



# Nutenkeilen, Distanzprofile und Eckprofile

Glasroving  
 Isophthalsäure Polyesterharz  
 Thermische Klasse F

Andere Zusammensetzungen und thermische Klassen auf Anfrage.

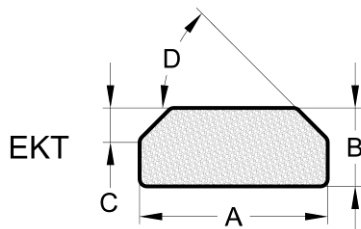

AxBxC/D
3,0x2,0x1/45
3,5x2,5x1/45
4,0x1,5x0,7/55
4,5x2,5x1/45
5,5x2,5x1/45
6,2x2,6x1/45
6,7x2,5x1/45
7,0x2,0x2/31
7,5x2,5x1/45
7,8x2,6x1/45
8,0x3,0x2,5/42
8,0x3,0x3/22
8,4x2,5x1/45
10,0x3,0x1/45
11,6x3,0x0,8/70



AxBxR
4,0x2,0xR2
4,0x2,5xR2
4,0x3,0xR2
4,5x3,0xR2,3
4,8x1,5xR3,2
5,0x2,0xR2,8
5,0x2,5xR2,5
5,0x3,0xR2,5
7,0x3,0xR4
9,0x3,0xR6,5
13,1x6,6xR6,5

